

PEGASUS LINEAR HIGH BAY



PEGASUS LINEAR HIGH BAY



Features

Housing: Pure Aluminum A6063
 Thermal Conductivity: 226 W/m·K
 Led: Cree
 CRI: Ra>70 (80/90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Osram
 Driver Efficiency: >93%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 10KV
 Waterproof: IP54
 Impact Test: IK08
 Electrical: 220-240V, 50/60Hz
 Operating Temperature: -40C~60C
 Tm21: L90B10>50,000H
 Lifetime: 50,000H



Specifications :-

170LM/W

S.NO.	Product Code	LED	Watt (W)	Voltage (V)	Lumen (lm)	CRI	Power factor	IK	IP	Radiator Size (mm)
1	BL-J1EG50-CO	Cree	50W	220~240	8500lm	>70(80)	> 0.95	IK08	IP54	300*150*55.2
2	BL-J1EG100-CO	Cree	100W	220~240	17000lm	>70(80)	> 0.95	IK08	IP54	577*150*55.2
3	BL-J1EG150-CO	Cree	150W	220~240	25500lm	>70(80)	> 0.95	IK08	IP54	862*150*55.2
4	BL-J1EG200-CO	Cree	200W	220~240	34000lm	>70(80)	> 0.95	IK08	IP54	1148*150*55.2


PEGASUS LINEAR HIGH BAY



Pure Aluminum heatsink



We provide 5 kinds of lens with different beam angles for option. To realize cost effective, suitable lens will be used for different project.

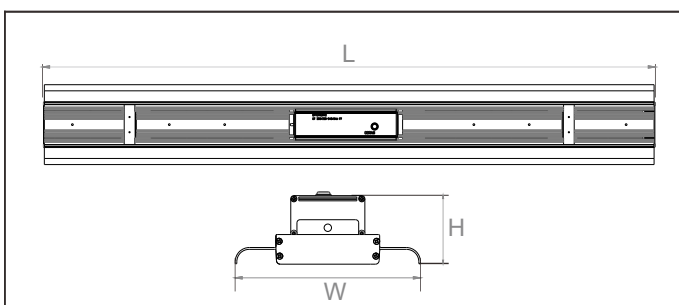

Functions

ZigBee PWM DALI 0/1~10V Micro-wave PIR

Optical options:

