

RAY-II

Anti-glare Recessed Mounted Downlight

Description:

Britlite Ray-II Series an Anti-glare LED Downlight is designed with a shielded light source with precise cut off reflectors that reduces glare and improves visual comfort. Combined with variety of color plating reflectors which meets the requirement of different applications, it also provides different solution for projects and distribution with different sizes & wattages.

It is Ideal for your planned retrofit creating tremendous energy saving at an extremely affordable price .



Application:

- Villa, Lobbies, Corridors, Malls
- Hotels, Restaurants, Hospitals
- Residential Lighting



RAY-II

Anti-glare Recessed Mounted Downlight

Features:

- LED Inside with Anti-glare rings UGR<16
- COB with different beam angles
- 4 colors of reflectors optional for different application
- SDCM=3
- Long lifetime
- Energy savings
- Maintenance savings
- instant light-up
- Excellent light quality
- No UV or IR radiation
- Environmentally-friendly: no mercury
- Life :> 50,000 hours (L80B50) at ambient temperature of 25 ° C

Specification:

- Driver: LIFUD / NOBOMBS
- Lighting Source: BRIDGELUX / OSRAM
- Housing material: aluminum
- Housing color: White Black
- Working environment temperature: -20°C ~ +45°C
- Lamp Certificates: CE ROHS




Product Code	Electrical parameters			Optical parameters				Physical parameter	
	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Cutout (mm)
BL-DLF-A-07	AC220-240V AC100-277V	7W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D70 *H55	Ø60
BL-DLF-A-12	AC220-240V AC100-277V	12W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D95* H75	Ø80
BL-DLF-A-15	AC220-240V AC100-277V	15W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D120*H95	Ø100
BL-DLF-A-25	AC220-240V AC100-277V	25W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D140*H105	Ø120
BL-DLF-A-30	AC220-240V AC100-277V	30W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D167*H120	Ø150
BL-DLF-A-40	AC220-240V AC100-277V	40W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D197*H140	Ø185
BL-DLF-A-50	AC220-240V AC100-277V	50W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D236*H165	Ø200
BL-DLF-A-60	AC220-240V AC100-277V	60W	Osram / Bridgelux	100LM/W	15/30/45	2700K 3000K 4000K 5000K	80+/90+	D236*H165	Ø200

RAY-II

Anti-glare Recessed Mounted Downlight

Anti-Glare :

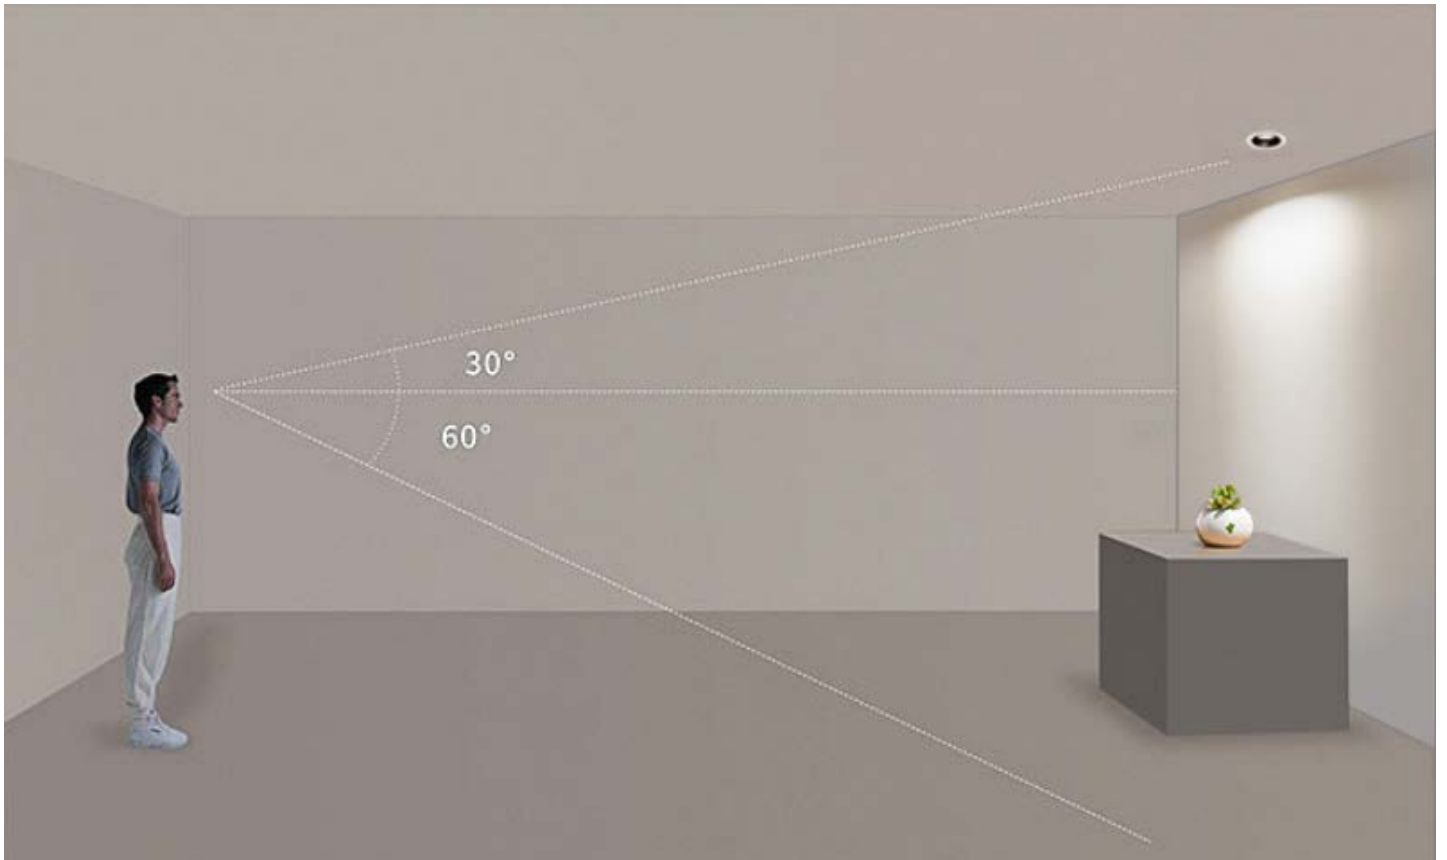

Pictures :

