Clean Room Light WITH BEVEL FRAME

Britlite Clean Room Panel Light with Bevel Frame emits an optimal lighting curve, uniform lighting throughout the projection area. Our Panel light has a high efficiency & low consumption and the flexible mounting possibilities mean that this light can be used in a wide range of applications such as:-

Health Care, Food Production Facilities, Operating Rooms, & Clean Rooms.

The fixtures is also in compliant with all relevant standards.



BEVEL FRAME

Products Features:-

- Ultra-thin and lightweight design, with perfect uniformity of light.
- Minimalistic & aesthetically appealing approach with low energy & low maintenance.
- Special design for waterproof
- Silicon strip on face and back, double fixation plate, waterproof connector to driver on back plate.

Technical Parameters:-

Input Voltage: AC220-240V 50/60Hz

Power Factor: PF>0.9

• Flicker Free

Energy Efficiency Class: A+

Color Rendering Index: Ra>80

● Beam Angle: 1200

Lifespan: >50,000Hrs

Operating Temperature: -20~+ 45°C

IP Rating: IP65

Protection Class: Class II

Housing Material: Aluminium

Color Consistency: SDCM 6

Clean Room Light WITH BEVEL FRAME

Product Specifications

Product Code	Input Voltage	Efficiency	Wattage	Lumens (lm -/ +) 10%	ССТ (К)	Dimension
BLP-22-W15-300	220-240V	85-90lm/w	15W-18W	1275lm	3000K-6000K	300*300mm
BLP-22-W20-300	220-240V	85-90lm/w	20W-25W	1700lm	3000K-6000K	300*300mm
BLP-22-W45-600	220-240V	110lm/w	45W	4950lm	3000K-6000K	600*600mm
BLP-22-W55-600	220-240V	100lm/w	55W	5500lm	3000K-6000K	600*600mm
BLP-66-W45-150	220-240V	85-90lm/w	45W	3825lm	3000K-6000K	1200*150mm
BLP-66-W55-150	220-240V	70lm/w	55W	3850lm	3000K-6000K	1200*150mm
BLP-66-W45-1200	220-240V	110lm/w	45W	4950lm	3000K-6000K	1200*300mm
BLP-66-W55-1200	220-240V	100lm/w	55W	5500lm	3000K-6000K	1200*300mm
BLP-66-W55-1260	220-240V	100lm/w	55W	5500lm	3000K-6000K	1200*600mm



BEVEL FRAME





➤ IP68 Stainless Steel Cable Gland.




➤ IP68 Wiring Connector



➤ 44 pcs bolts to ensure IP65 rating.

Clean Room Light WITH BEVEL FRAME

Dimension

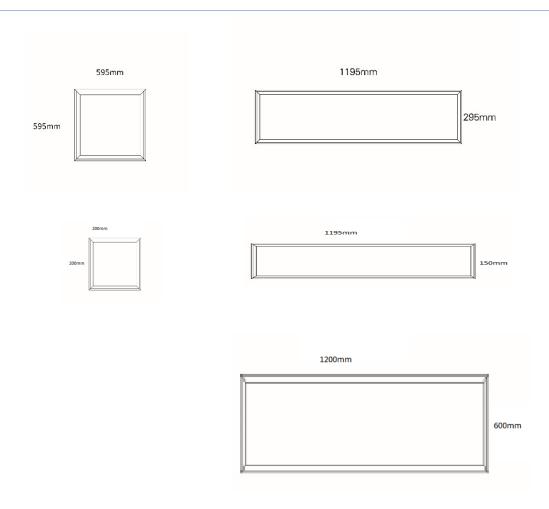

Photometrics

