



OPAL RECESSED DOWNLIGHT

BRITLITE OPAL LED Recessed Downlight is specifically designed to produce a cost effective and well performing downlight solution to the market, with an anti-glare PMMA cover, Opal diffuser, complete with high quality LED Driver, and comes with a wide & unique sunken design to protect your eyes from glare, a comfortable and very homogenous light.



Application:

- General lighting areas
- Hotel, & Office lighting
- Residential Lighting
- Retail Shops

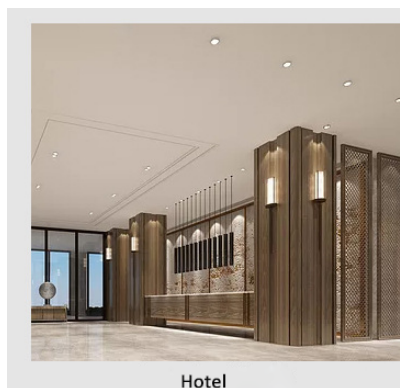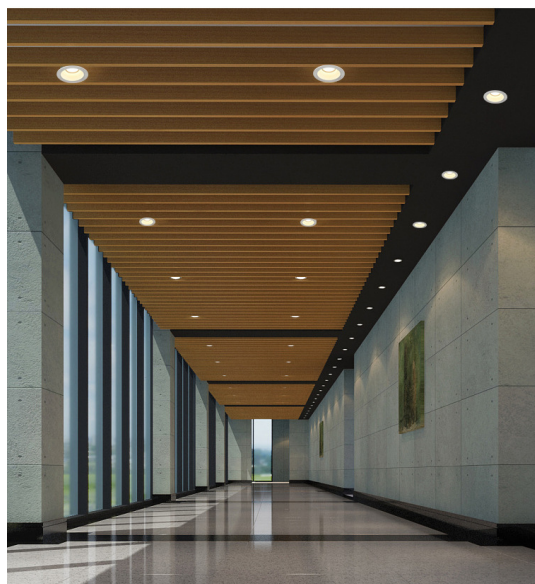

Hotel



Home



Shopping Mall



Clothes Store

OPAL RECESSED DOWNLIGHT

Features:-

- Opal diffuser glare free design , No flickers.
- Direct replacement for compact fluorescent lamp downlights
- Energy savings of up to 60% compared to luminaires that use CFL
- Adopt aluminum alloy as material die-casting process.
- High transmission PMMA Cover
- No UV or IR radiation
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 ° C
- Working environment temperature: -20°C ~+45°C
- Dimming options : Triac 0/ 1-10V
- Lamp Certificates: CE ROHS SAA



Product Code	Electrical parameters			Optical parameters				Physical parameter	
	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(°)	CCT (K)	CRI	Size (mm)	Cutout(mm)
BL-DLP6W-P1	AC220V-240V	6W	OSRAM	600LM	90°	2700K 3000K 4000K 5000K 6000K	80+	φ83*H43mm	φ75mm
BL-DLP9W-P1	AC220V-240V	9W	OSRAM	900LM	90°	2700K 3000K 4000K 5000K 6000K	80+	φ103*H50mm	φ95mm
BL-DLP12W-P1	AC220V-240V	12W	OSRAM	1200LM	90°	2700K 3000K 4000K 5000K 6000K	80+	φ133*H55mm	φ120mm
BL-DLP15W-P1	AC220V-240V	15W	OSRAM	1500LM	90°	2700K 3000K 4000K 5000K 6000K	80+	φ133*H55mm	φ120mm

