

Weatherproof


Recessed Mounted Downlight IP:65

Features:-

- ❖ High Quality Die-Casting Aluminum Housing + COB with Anti-glare PMMA Lens. A compact & integrated design.
- ❖ CREE LED Chip
- ❖ Silicone gasket to prevent moisture ingress.
- ❖ Wide beam angel 100°
- ❖ PF>0.90
- ❖ IP65
- ❖ 50000hours at LM80



Uniform Lighting Performance

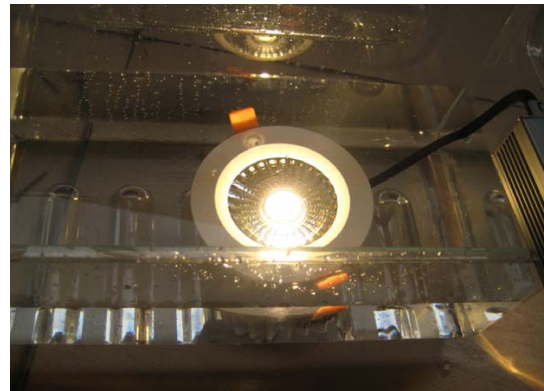

Product Code	Input Voltage	Wattage	Luminous Flux (lm) ±5%	Color Temperature CCT	Dimension	Cut out	Working Temperature
BL-DLWC / 12W	220-240V /AC	12W	1200 lm	2700K-6000K	D95*H51mm	Φ80~85mm	-30°~ 40°
BL-DLWC / 15W	220-240V /AC	15W	1500 lm	2700K-6000K	D115*H55mm	Φ90~95mm	-30°~ 40°
BL-DLWC / 20W	220-240V /AC	20W	2000 lm	2700K-6000K	D155*H67mm	Φ115~140mm	-30°~ 40°